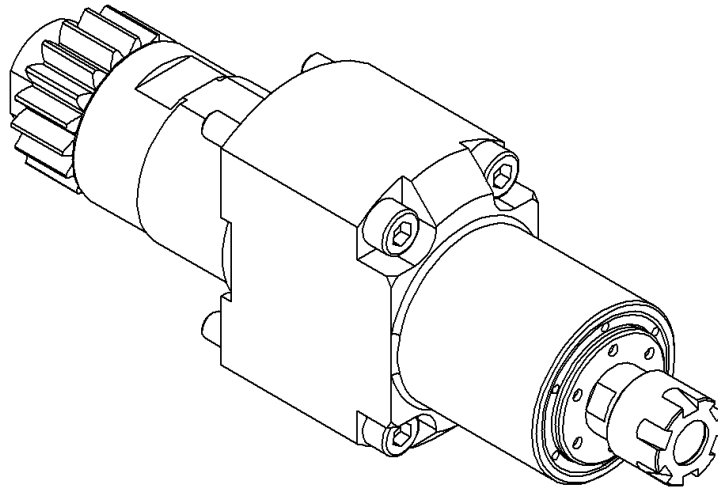

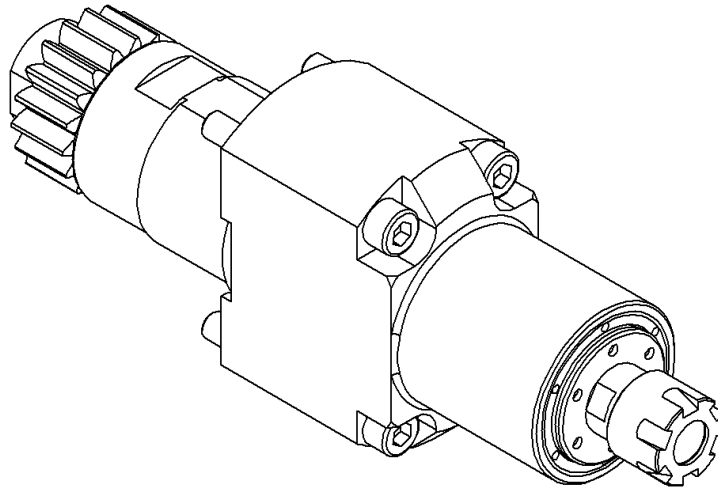

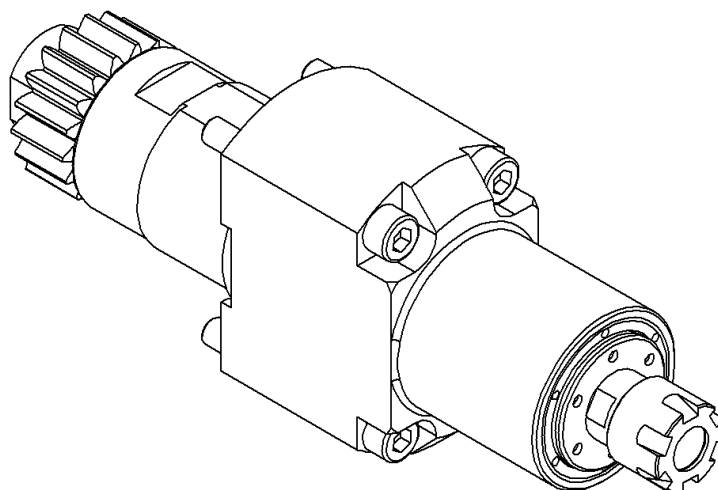



RSC1107-4x


Machine: CITIZEN Cincom
Type: L32
Emplacement, N°: Upper gang tool post, Back tool post
Travail sur: Broche principale
Type de travail: 
n_{max}: 22'800 [rpm]
i (n_i / n_o): 1 / 3.8
Attachement: ER11
Sans refroidissement
Infos:
Couple max : 0.2 Nm


RSC1107-4x

Machine: CITIZEN Cincom
Type: L32
Location, N°: Upper gang tool post, Back tool post
Work on: Main spindle
Type of work: 
n_{max}: 22'800 [rpm]
i (n_i / n_o): 1 / 3.8
Attachement: ER 11
Without coolant
Infos:
Torque max: 0.2 Nm

RSC1107-4x

Maschine: CITIZEN Cincom
Typ: L32
Position, N°: Upper gang tool post, Back tool post
Arbeit über: Hauptspindel
Arbeitstyp: 
 n_{max} : 22'800 [rpm]
 i (n_i / n_o): 1 / 3.8
Befestigung: ER 11
Ohne Kühlmittel
Infos:
Max. Drehmoment: 0.2 Nm

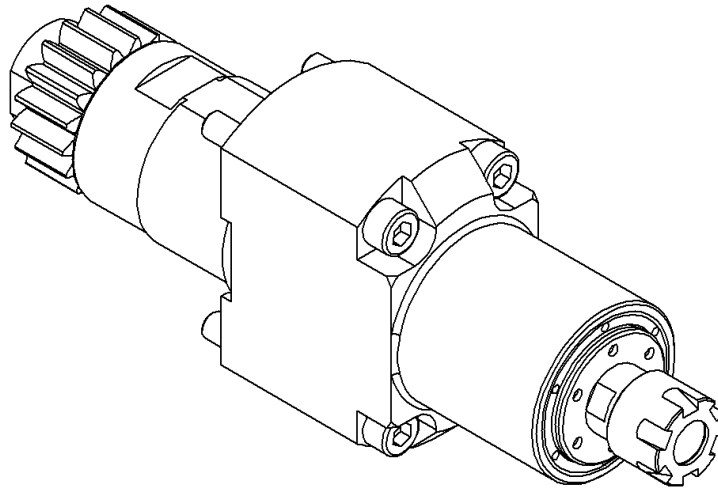RSC1107-4x

Macchina: CITIZEN Cincom
Tipo: L32
Posizione, N°: Upper gang tool post, Back tool post
Lavoro al: Mandrino principale
Tipo di lavoro: 
n_{max}: 22'800 [rpm]
i (n_i / n_o): 1 / 3.8
Atacco: ER 11
Senza refrigerante
Informazioni:
Coppia max: 0.2 Nm